


TYPICAL ROCK RETAINING WALL DIAGRAM

If Erosion Fabric is not installed, erosion will be controlled with an effective method.

Signature

Date

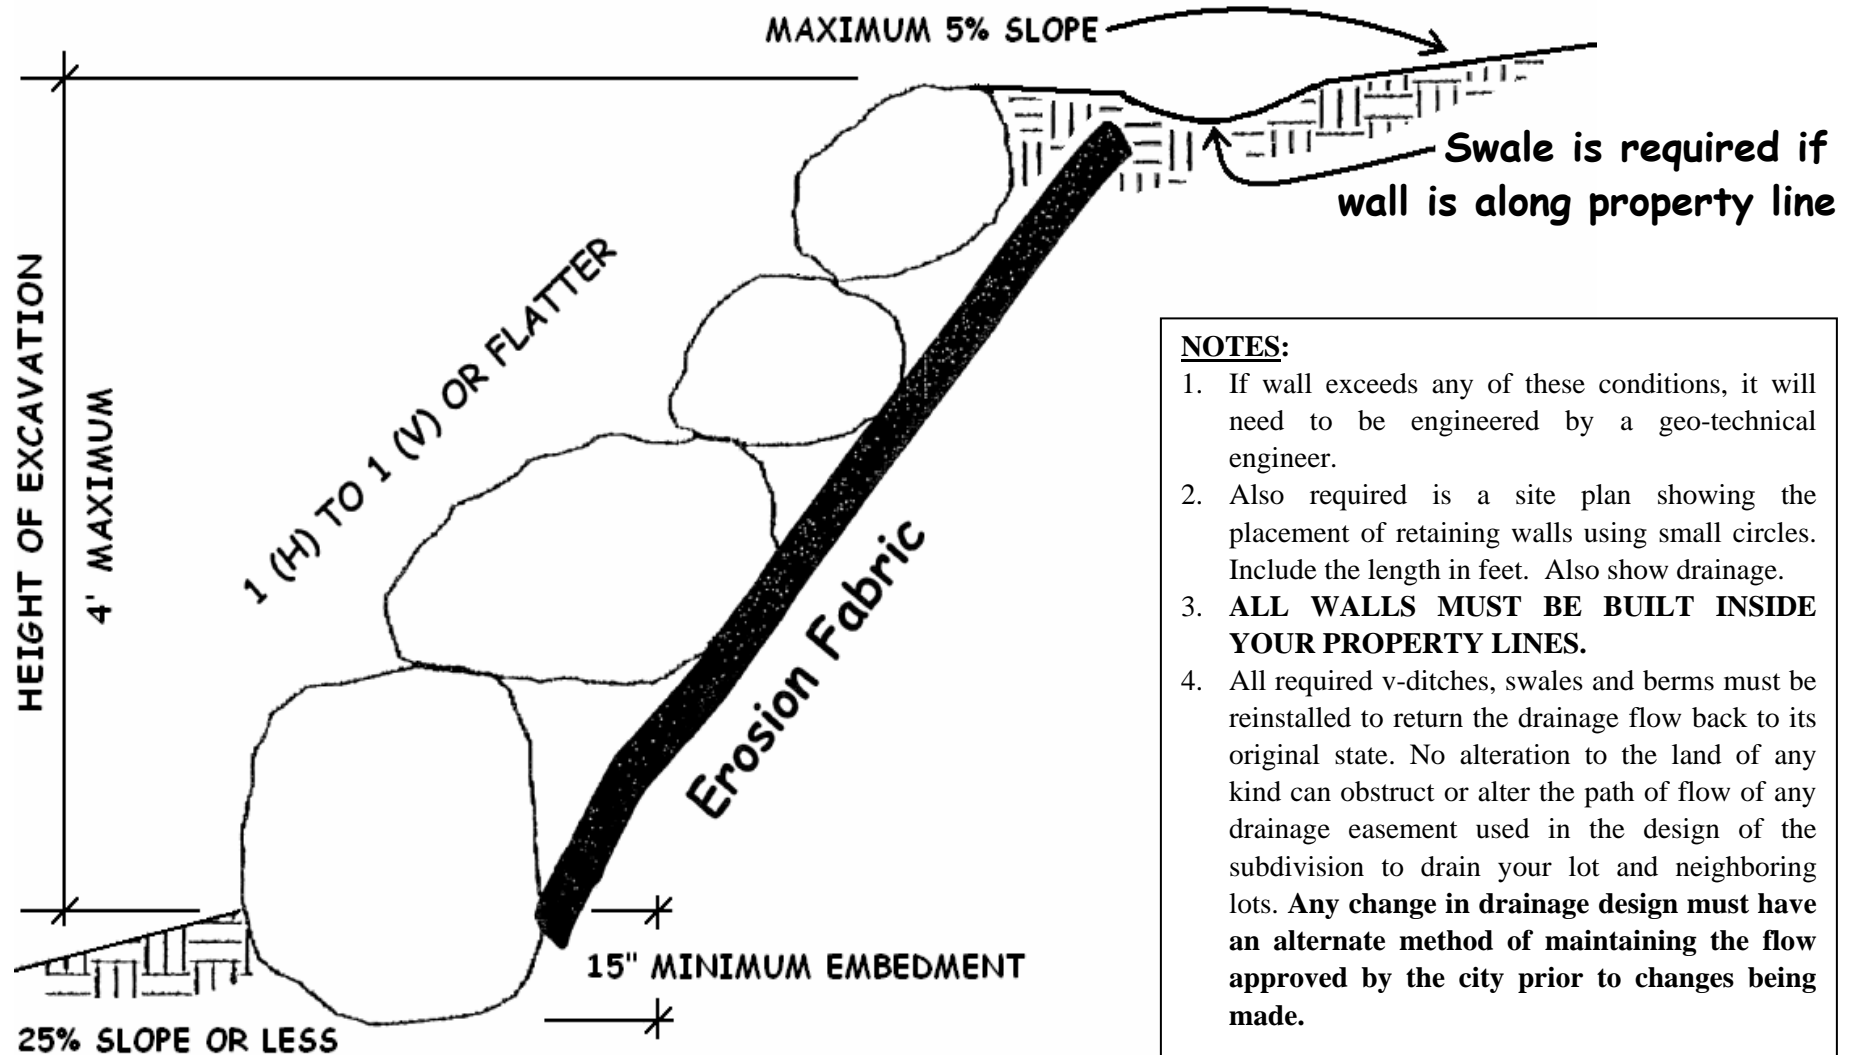

NOTES:

1. If wall exceeds any of these conditions, it will need to be engineered by a geo-technical engineer.
2. Also required is a site plan showing the placement of retaining walls using small circles. Include the length in feet. Also show drainage.
3. **ALL WALLS MUST BE BUILT INSIDE YOUR PROPERTY LINES.**
4. All required v-ditches, swales and berms must be reinstalled to return the drainage flow back to its original state. No alteration to the land of any kind can obstruct or alter the path of flow of any drainage easement used in the design of the subdivision to drain your lot and neighboring lots. **Any change in drainage design must have an alternate method of maintaining the flow approved by the city prior to changes being made.**